

TECHNICAL DATA SHEET
Product Description:

F-UPF is a transparent polyester film

It is one side coated modified surface and other side

is untreated or corona treated

Application:

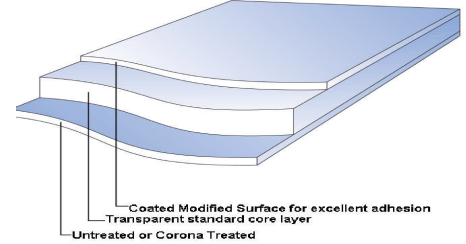
Printing, lamination & metallization

Hot fill, Pasteurization, Sterilization & Retort application**

** Selection of specific ink & adhesive designed for retort application

Key Features:

- ▶ Very good clarity & transparency
- ▶ Excellent mach inability & handling properties
- ▶ Universal film having modified surface which provides excellent adhesion with various types of Ink and adhesive
- ▶ Excellent bonding with metal

Film Structure


PROPERTIES	TEST METHOD (ASTM)	UNIT	TYPICAL VALUE									
			8	9	10	12	15	19	23	36	50	
THICKNESS	Internal	Micron	8	9	10	12	15	19	23	36	50	
		(Gauge)	32	36	40	48	60	76	92	144	200	
FILM DENSITY	D-1505	gm/cc	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	
GRAMMAGE	Internal	gm/m ²	11.2	12.6	14.0	16.8	21.0	26.6	32.2	50.4	70.0	
YIELD	Internal	m ² /kg	89.28	79.36	71.42	59.52	47.62	37.59	31.05	19.84	14.28	
		in ² /lb	62901	55912	50318	41934	33550	26483	21876	13978	10060	
TREATMENT LEVEL # (Modified layer Side) (Min)	D-2578	dyne/cm	48	48	48	48	48	48	48	48	48	
COEFF OF KINETIC FRICTION (Coated to untreated) (Coated to corona) (Max)	D-1894	-	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.45	0.45	
		-	0.55	0.55	0.55	0.55	0.55	0.55	0.55	0.55	0.50	
HAZE (max)	D-1003	%	4.0	4.0	4.0	4.0	4.0	4.0	4.5	5.0	5.5	
TENSILE STRENGTH AT BREAK	MD* TD*	D-882	Kg/cm ²	1900	1900	1900	1900	1900	1900	1900	1750	1750
				2000	2000	2000	2000	2000	2000	2000	2000	2000
TENSILE STRENGTH AT BREAK	MD* TD*	D-882	(Psi)	27000	27000	27000	27000	27000	27000	27000	25000	25000
				28500	28500	28500	28500	28500	28500	28500	28500	28500
ELONGATION AT BREAK	MD TD	D-882	%	90	90	100	105	105	110	115	120	125
				80	80	80	85	85	85	90	90	90
LINEAR SHRINKAGE (Max.) (30 Minute at 150°C)	MD TD	D-1204	%	3.0								
				1.0								
W.V.T.R.(38°C & 90%RH) (Max.)	F-1249	gm/m ² /day (gm/100in ² /day)	50	50	50	45	40	35	30	20	16	
			3.2	3.2	3.2	2.9	2.6	2.3	2.0	1.3	1.0	
O.T.R. (23°C & 0%RH) (Max.)	D-3985	cc/m ² /day (cc/100in ² /day)	155	155	155	130	110	90	80	70	45	
			10.1	10.1	10.1	8.5	7.1	5.8	5.2	4.5	2.9	

Ref no QAD UFLI S/11 - F44/1

*MD = MACHINE DIRECTION *TD = TRANSVERSE DIRECTION

The inherent surface tension of the untreated side of any Pet film is minimum 42 dy/cm

STORAGE & HANDLING:

FLEXPET™ need to be stocked in a closed warehouse and should not be exposed to direct sunlight or light sources and from humidity. It is recommended to store below 35°C in dry place. FLEXPET™ is suitable for use within 9 month from date of manufacturing, only if material is stored in recommended condition.

FOOD CONTACT:

FLEXPET™ complies with EC and FDA regulations on packaging for direct contact with foodstuffs.. Specific document and MSDS are available on request.

DISCLAIMER:

It is the responsibility of our customer to determine that their use of our product(s) is safe, lawful, and technically suitable in their intended applications. The Values given in the technical data sheet represent typical values based on the best of our knowledge as on date when the data was compiled. It is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability / compatibility in all respects. Flex Gives no warranty or accept liability for any loss and fitness of the product for any specific purpose. Flex reserves the right to change the technical data sheet at any time for enhancing the quality of the products without prior information